
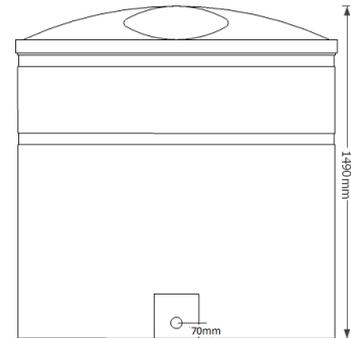


# ECO1450BO

Product description: cylindrical 1450 litre bunded oil tank



### Minimum Base Required

Diameter

2030mm

### Product Information

Height	Diameter	Outlet	Fill Point	Weight	Security
1490mm	1430mm	1" BSP bottom	2" overfill prevention valve	100kg	Lockable lid

Sizes approximate, owing to shrinkage

#### PRODUCT DETAILS:

- Suitable for the storage of Kerosene (C1/C2), Fuel Oil (A2) and GasOil/Diesel (D) as defined in BS2869 and BSEN590 including up to 10% biofuel to BSEN14214
- Bund contains minimum 110% volume of the inner tank
- Made from UV stabilised virgin polymer
- Designed and manufactured in the UK
- Bunded oil storage to protect the environment
- 4" inspection cap

#### OPTIONAL EXTRAS:

- Alarms
- Filter valve pack
- Electronic level gauge
- Bund alarm
- Tigerloop and Tigerloop Kit
- Spill kit
- Fire valves
- Qual oil pipe
- Top outlet
- Colour options (Ecostone range)

#### BENEFITS:

- Exceptionally economical high capacity oil storage
- Suitable for domestic, agricultural, & industrial use
- High impact strength
- Bunded construction offers integral protection from leakage and overfilling
- Covered bund prevents collection of rainwater & debris
- Rotationally moulded for strength and durability
- 10 year warranty against manufacturing defects



Scan to view our full range of oil tanks



Etills Ltd  
Unit 1 Whiting Way,  
Melbourn,  
Royston,  
SG8 6NA

Tel: 01763 261781  
Fax: 01763 268409

This specification may be subject to change without notice; please call to confirm details.